

PE145TC-1.5-4-RB

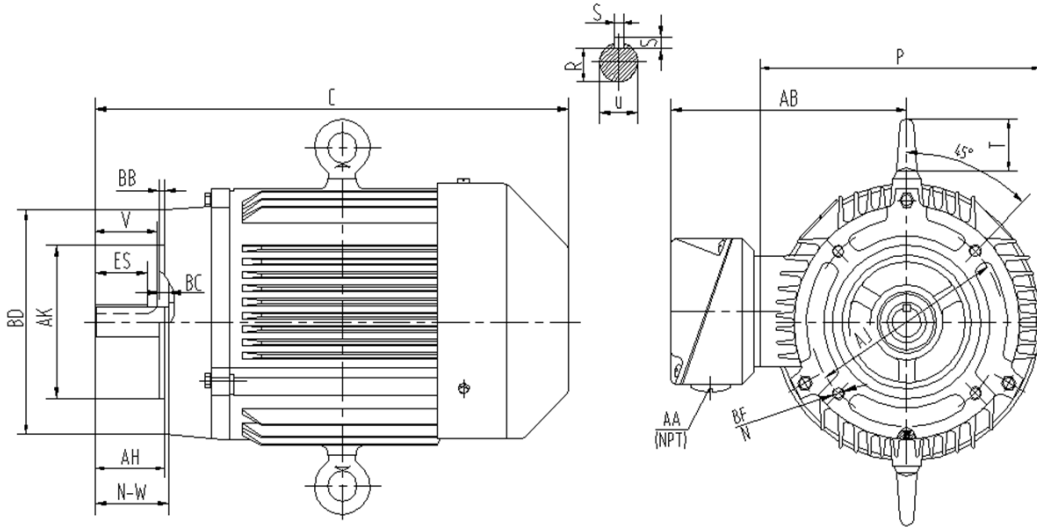
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE FOOTLESS

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	Mounting									
			C	P	T	AK	AJ	AH	BA	BB	BC	BF
1.5	1800	145TC	15.20	8.17	1.50	4.500	5.88	2.12	2.25	0.16	0.12	4*3/8-16

Shaft Extension, Key Set					Conduit Box		Bearings		Mount
U	R	S	ES	N-W	AA	AB	DE	ODE	
0.875	0.771	0.189	1.42	2.25	0.75	7.60	6206-ZZ	6206-ZZ	F1

BEARING LUBRICATION: The bearings come lubricated with Mobile Polyrex EM Polyurea Grease.





PE145TC-1.5-4-RB

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE FOOTLESS

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31









Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1.5	1740	145TC	208-230/460	60	1.15	F	B	3.3	M	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
2.2	20.0	86.5	86.3	85.0	84.0	0.760	0.710	0.580	4.5	320	330	6206-ZZ	6206-ZZ	9 Lead 2Y/Y	68

NAME PLATE

 										CONNECTION DIAGRAMS 208 - 230V 		
CAT NO: PE145TC-1.5-4-RB		FRAME 145TC			PHASE 3							
HZ 60	S.F. 1.15	HZ 50	S.F. 1.0	ENCL TEFC	IP 55							
HP 1.5	RPM 1740	HP 1.5	RPM 1430	DUTY CONT	DES B							
VOLTS 208-230/460		VOLTS 190/380		AMB 40° C	INS F							
FLA 4.9 - 4.4 / 2.2	FLA 5/2.5			DE BEARING 6206-ZZ								
CODE M	P.F. 0.76	CODE J	P.F. 0.76	ODE BEARING 6206-ZZ								
EFF 86.5	MIN 84.0	EFF 84.0	MIN 81.5	LUB: Mobile Polyrex EM								
MOTOR WEIGHT 68 LBS	CONNECTION 9 Lead 2Y/Y		SER NO									
General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hernando, Mississippi										460V 		
   												

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.